


## Identification Codes



## Tank

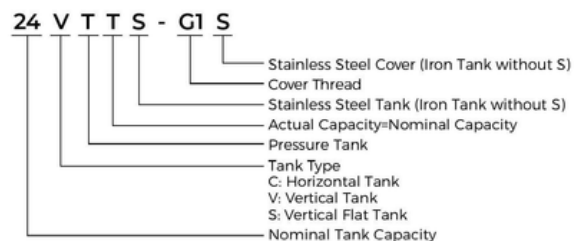

| Model | Max. Pressure (bar) | Nominal Capacity (L) | Actual Capacity (L) | Membrane | Max. Temp | Connection |
|-------|---------------------|----------------------|---------------------|----------|-----------|------------|
| 24ST  | 8                   | 24                   | 20                  | EPDM     | 99°C      | G1"        |

The service life of the membrane is 50,000 cycles.



| Model | Max. Pressure (bar) | Nominal Capacity (L) | Actual Capacity (L) | Membrane | Max. Temp | Connection |
|-------|---------------------|----------------------|---------------------|----------|-----------|------------|
| 2VT   | 8                   | 2                    | 2                   | EPDM     | 99°C      | G1/2"      |
| 4VT   | 8                   | 4                    | 4                   | EPDM     | 99°C      | G1"        |
| 8VT   | 8                   | 8                    | 8                   | N.R      | 99°C      | G1"        |
| 19VT  | 8                   | 19                   | 18                  | EPDM     | 99°C      | G1"        |
| 24VT  | 8                   | 24                   | 20                  | EPDM     | 99°C      | G1"        |
| 24VTT | 8                   | 24                   | 24                  | EPDM     | 99°C      | G1"        |

The service life of the membrane is 50,000 cycles.



| Model  | Max. Pressure (bar) | Nominal Capacity (L) | Actual Capacity (L) | Membrane | Max. Temp | Connection |
|--------|---------------------|----------------------|---------------------|----------|-----------|------------|
| 19CT   | 8                   | 19                   | 18                  | EPDM     | 99°C      | G1"        |
| 24CT   | 8                   | 24                   | 20                  | EPDM     | 99°C      | G1"        |
| 24CTT  | 8                   | 24                   | 24                  | EPDM     | 99°C      | G1"        |
| 50CT   | 8                   | 50                   | 36                  | EPDM     | 99°C      | G1"        |
| 50CTT  | 8                   | 50                   | 50                  | EPDM     | 99°C      | G1"        |
| 60CT   | 8                   | 60                   | 60                  | EPDM     | 99°C      | G1"        |
| 100CT  | 8                   | 100                  | 80                  | EPDM     | 99°C      | G1"        |
| 100CTT | 8                   | 100                  | 100                 | EPDM     | 99°C      | G1"        |

The service life of the membrane is 50,000 cycles.



| Model  | Max. Pressure (bar) | Nominal Capacity (L) | Actual Capacity (L) | Membrane | Max. Temp | Connection |
|--------|---------------------|----------------------|---------------------|----------|-----------|------------|
| 50FT   | 8                   | 50                   | 36                  | EPDM     | 99°C      | G1"        |
| 50FTT  | 8                   | 50                   | 50                  | EPDM     | 99°C      | G1"        |
| 60FTT  | 8                   | 60                   | 60                  | EPDM     | 99°C      | G1"        |
| 100FT  | 8                   | 100                  | 80                  | EPDM     | 99°C      | G1"        |
| 100FTT | 8                   | 100                  | 100                 | EPDM     | 99°C      | G1"        |
| 200FTT | 10                  | 200                  | 200                 | BUTLY    | 99°C      | G1 1/2"    |
| 300FTT | 10                  | 300                  | 300                 | BUTLY    | 99°C      | G1 1/2"    |

The service life of the membrane is 50,000 cycles.

## 3-Way / 5-Way



5TA



5TB



3TA

| Model | Connection | Length  |
|-------|------------|---------|
| 3TA   | G1"        | 70 , 80 |
| 5TA   | G1"        | 80 , 90 |
| 5TB   | G1"        | 80 , 90 |

## Foot Valve



FVA

| Model   | Connection |
|---------|------------|
| FVA1    | 1"         |
| FVA1.25 | 1 1/4"     |
| FVA1.5  | 1 1/2"     |
| FVA2    | 2"         |
| FVA3    | 3"         |

- Stainless Steel mesh
- Can be used as a check valve

## Flexible Hose



| Model            | FH12.8-01(L=128mm)                                            | FH44-03(L=440mm) |
|------------------|---------------------------------------------------------------|------------------|
| Inlet            | G3/4"                                                         | G1"              |
| Outlet           | G3/8"                                                         | G1"              |
| Material         | Stainless steel wire                                          |                  |
| Operating Limits | Fluid temperature up to 35°C<br>Max. ambient temperature 40°C |                  |

## Filter



| Model            | WF-01B                                                        | WF-02B  |
|------------------|---------------------------------------------------------------|---------|
| Inlet/Outlet     | 1" x 1"                                                       | 1" x 1" |
| Capacity         | 1L                                                            | 2L      |
| Max. Pressure    | 5 bar                                                         | 5 bar   |
| Operating Limits | Fluid temperature up to 35°C<br>Max. ambient temperature 40°C |         |