


Identification Codes

24 V T T S - G1 S



Tank

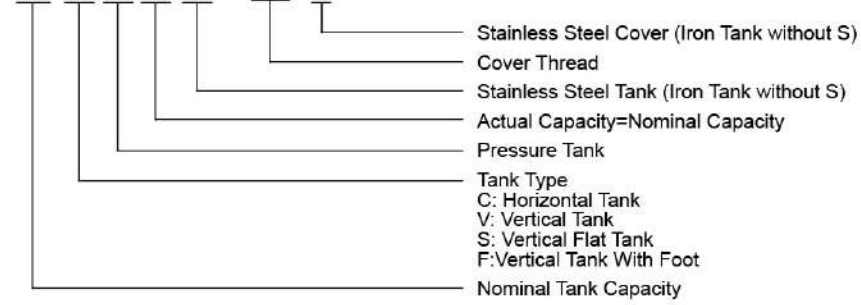

Model	Max. Pressure (bar)	Nominal Capacity (L)	Actual Capacity (L)	Membrane	Max. Temp	Connection
24ST	8	24	20	EPDM	99°C	G1"
24STT	8	24	24	EPDM	99°C	G1"

The service life of the membrane is 50,000 cycles.



Model	Max. Pressure (bar)	Nominal Capacity (L)	Actual Capacity (L)	Membrane	Max. Temp	Connection
2VT	8	2	2	EPDM	99°C	G1/2"
4VT	8	4	4	EPDM	99°C	G1"
8VT	8	8	8	N.R.	99°C	G1"
19VT	8	19	18	EPDM	99°C	G1"
24VT	8	24	20	EPDM	99°C	G1"
24VTT	8	24	24	EPDM	99°C	G1"

The service life of the membrane is 50,000 cycles.



Model	Max. Pressure (bar)	Nominal Capacity (L)	Actual Capacity (L)	Membrane	Max. Temp	Connection
19CT	8	19	18	EPDM	99°C	G1"
24CT	8	24	20	EPDM	99°C	G1"
24CTT	8	24	24	EPDM	99°C	G1"
50CT	8	50	36	EPDM	99°C	G1"
50CTT	8	50	50	EPDM	99°C	G1"
60CTT	8	60	60	EPDM	99°C	G1"
100CT	8	100	80	EPDM	99°C	G1"
100CTT	8	100	100	EPDM	99°C	G1"

The service life of the membrane is 50,000 cycles.



Model	Max. Pressure (bar)	Nominal Capacity (L)	Actual Capacity (L)	Membrane	Max. Temp	Connection
50FT	8	50	36	EPDM	99°C	G1"
50FTT	8	50	50	EPDM	99°C	G1"
60FTT	8	60	60	EPDM	99°C	G1"
100FT	8	100	80	EPDM	99°C	G1"
100FTT	8	100	100	EPDM	99°C	G1"

The service life of the membrane is 50,000 cycles.

3-Way/5-Way



5TA 5TB 3TA

Model	Connection	Length
3TA	G1"	70. 80. 90
5TA	G1"	70. 80. 90
5TB	G1"	70. 80. 90

Foot Valve



FVA

Model	Connection
FVA1	1"
FVA1.25	1 1/4"
FVA1.5	1 1/2"
FVA2	2"
FVA3	3"

- Stainless steel mesh
- Can be used as a check valve

Flexible Hose



Model	FH12.8-01 (L=128mm)	FH44-03 (L=440mm)
Inlet	G ³ / ₄ "	G1"
Outlet	G ³ / ₈ "	G1"
Material	Stainless steel wire	Stainless steel wire
Operating Limits	Fluid temperature up to 35°C; Maximum ambient temperature 40°C.	

Filter



Model	WF-01A	WF-02A
Inlet/Outlet	1" x 1"	1" x 1"
Capacity	1L	2L
Max. Pressure	5bar	5bar
Operating Limits	Fluid temperature up to 35°C; Maximum ambient temperature 40°C.	

Pressure Switch



PS-02B

- High precision
- High sensitivity
- Adjustable pressure range 1.4~5.6 bar
- G1/4"



PS-02C


- High precision
- High sensitivity
- Adjustable pressure range 1.4~5.6 bar
- G1/4"

Pressure Gauge



Axial

Radial

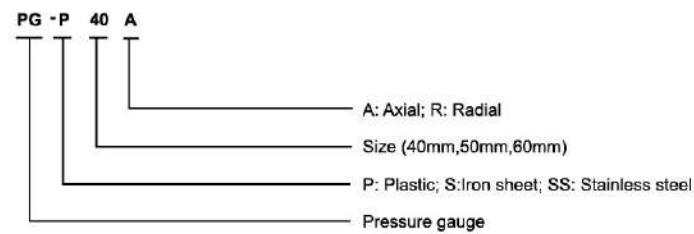

- Two connection types: (1)G1/4" (2)M10×1
- For 40mm gauge, the scale: 0-6 bar
- For 50mm gauge, the scale: 0-10 bar or 0-6 bar
- Back/bottom connection

Electromagnetic Switch



PS-04A

RATED VOLTAGE	220V~240V/110V~120V
FREQUENCY	50/60Hz
MAX. CURRENT	10A
MAX. POWER	1.1kW/1.5kW
STARTING PRESSURE SETTING	1.2bar/1.5bar/2.2bar
MAX. OPERATING PRESSURE	10bar
CONNECTION THREAD	G1"
PROTECTION CLASS	IP65
MAX. OPERATING TEMPERATURE	60°C
CABLE REQUIREMENT	Cable diameter 7.5~9mm



PS-04B

RATED VOLTAGE	220V~240V/110V~120V
FREQUENCY	50/60Hz
MAX. CURRENT	10A
MAX. POWER	1.1kW/1.5kW
STARTING PRESSURE SETTING	1.2bar/1.5bar/2.2bar
MAX. OPERATING PRESSURE	10bar
CONNECTION THREAD	G1"
PROTECTION CLASS	IP65
MAX. OPERATING TEMPERATURE	60°C
CABLE REQUIREMENT	Cable diameter 7.5~9mm

Optional: Working pressure adjustable



PS-04C

RATED VOLTAGE	220V~240V/110V~120V
FREQUENCY	50/60Hz
MAX. CURRENT	10A
MAX. POWER	1.1kW/1.5kW
STARTING PRESSURE SETTING	1.5bar/2.2bar
MAX. OPERATING PRESSURE	10bar
CONNECTION THREAD	G1"
PROTECTION CLASS	IP54
MAX. OPERATING TEMPERATURE	60°C
CABLE REQUIREMENT	Cable diameter 7.5~9mm

